

High Resolution Oscilloscope

Tablet Oscilloscope

Automotive Oscilloscope

Optical-fiber Isolated Probe

High Voltage Differential Probe

AC/DC Current Probe

AC Current Probe

PRODUCT CATALOG



High Resolution Oscilloscope


MHO 3 series



3.58cm ultra-thin



Mic-OPITM probe interface

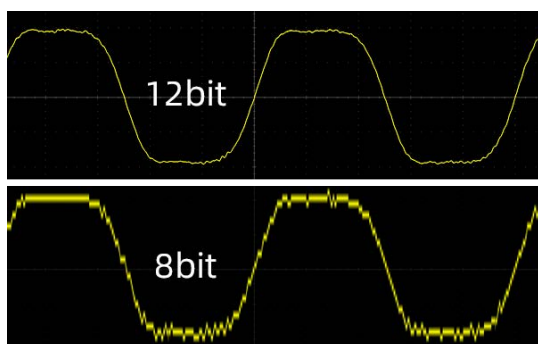

- ▶ 12-bit vertical resolution
- ▶ 3.58cm ultra-thin design, support wall / arm mounting
- ▶ Mic-OPITM probe interface, automatic probe calibration
- ▶ Noise floor less than 80μVrms
- ▶ 14" TFT touch display, 1920x1200 high definition
- ▶ Segmented storage acquisition
- ▶ USB 3.0 Host, USB-C, LAN, Ground, HDMI connections
- ▶ Standard ARINC-429, MIL-STD-1553B decoders

Model / Ordering Number	MHO3-5004	MHO3-3504	MHO3-2504
Bandwidth	500MHz	350MHz	250MHz
Rise time	≤ 0.7ns	≤ 1ns	≤ 1.4ns
Analog channels	4	4	4
Sampling rate	3GSa/s	3GSa/s	3GSa/s
Memory depth	360Mpts	360Mpts	360Mpts
Waveform capture rate	230,000 wfms/s	230,000 wfms/s	230,000 wfms/s
Vertical resolution	12 bits		
Noise	< 80μVrms		
Interfaces	USB 3.0 Host, USB type-C, LAN, HDMI, Trigger out		
Display	14" TFT LCD touch screen, 1920*1200 resolution		
Standard bus decoding	RS-232/422/485/UART, CAN, CAN FD, LIN, SPI, I ² C, ARINC-429, MIL-STD-1553B		
Dimension / Net weight	400*280*35.8mm / 4.3kg		

Digital Oscilloscope

MDO series




- ▶ Max. 500MHz bandwidth
- ▶ 360Mpts memory depth
- ▶ Mic-OPI™ probe interface, automatic probe calibration
- ▶ Noise floor < 90μVrms
- ▶ 14" TFT touch display, 1920x1200 high definition
- ▶ User-defined attenuation ratio setting
- ▶ USB 3.0 Host, USB-C, LAN, Ground, HDMI connections
- ▶ Standard ARINC-429, MIL-STD-1553B decoders

Wall / arm mounting




- ▶ 130 mm x 300 mm wall / arm mount interface, flexible and space-saving.

Complete connectivity

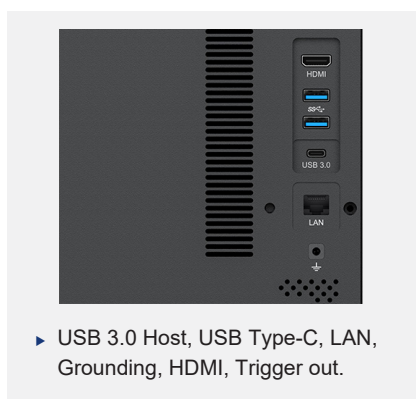

- ▶ USB 3.0 Host, USB Type-C, LAN, Grounding, HDMI, Trigger out.

Mic-OPI™ probe interface

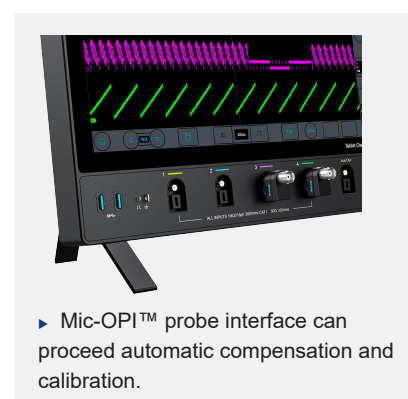


- ▶ Mic-OPI™ probe interface can proceed automatic compensation and calibration.

Model / Ordering Number	MDO5004	MDO3504	MDO2504
Bandwidth	500MHz	350MHz	250MHz
Rise time	≤ 0.7ns	≤ 1ns	≤ 1.4ns
Analog channels	4	4	4
Sampling rate	3GSa/s	3GSa/s	3GSa/s
Memory depth	360Mpts	360Mpts	360Mpts
Waveform capture rate	230,000 wfms/s	230,000 wfms/s	230,000 wfms/s
Vertical resolution	8 bits		
Noise	< 90μVrms		
Interfaces	USB 3.0 Host, USB type-C, LAN, HDMI, Trigger out		
Display	14" TFT LCD touch screen, 1920*1200 resolution		
Standard bus decoding	RS-232/422/485/UART, CAN, CAN FD, LIN, SPI, I ² C, ARINC-429, MIL-STD-1553B		
Dimension / Net weight	400*280*35.8mm / 4.3kg		

Tablet Oscilloscope

ETO Series

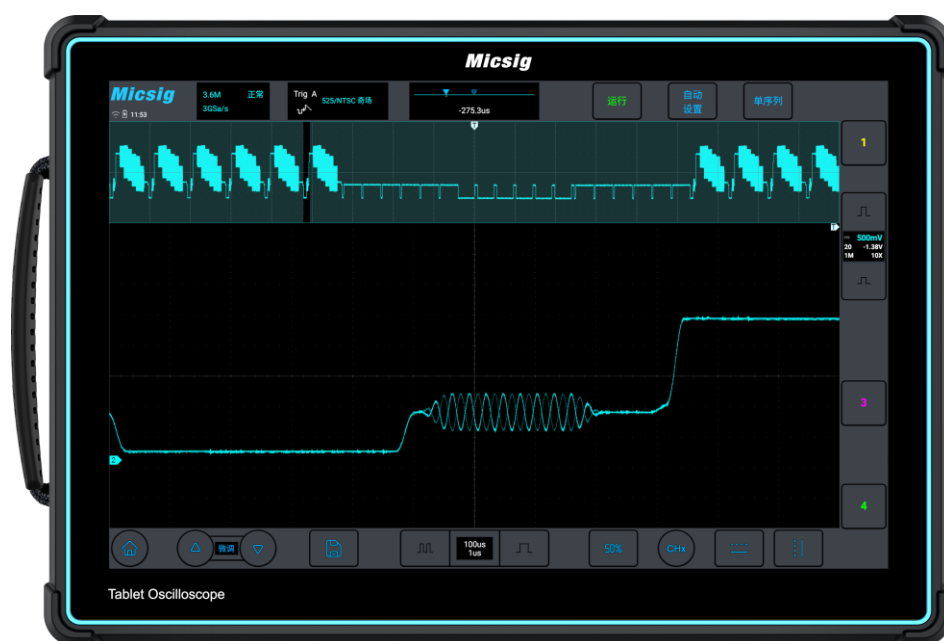

Remote Control



Built-in large-capacity battery, perfect to use in the field. Special power lock design prevents accidental startup.



75mm x 75mm standard VESA interface, compatible with various wall mounts




Mic-OPITM patented probe interface, easy to plug, automatic compensation. Also comes with BNC adapter to use on all oscilloscopes.

Model / Ordering Number	ETO5004	ETO3504
Bandwidth	500MHz	350MHz
Analog Channels	4	
Noise	< 90 μ Vrms	
Sampling Rate (Max.)	3GSa/s	
Memory Depth (Max.)	360Mpts	
Vertical resolution	8 bits	
Waveform Capture Rate (Max.)	230,000 wfms/s	
Interfaces	USB 3.0/2.0 Host, USB type-C, Ground, HDMI, Trigger out	
Display	14" TFT LCD touch screen, 1920*1200 resolution	
Standard bus decoding	RS-232/422/485/UART, CAN, CAN FD, LIN, SPI, I ² C, ARINC-429, MIL-STD-1553B	
Dimension / Battery	353*245*56 mm / 7.4V, 13500mAh	

Tablet Oscilloscope

TO Series

- ▶ Micsig dedicated SigtestUI™ multitasking system
- ▶ 10.1" integrated touchscreen with 1280*800 resolution
- ▶ Intuitive UI & Android OS make sure to use at ease
- ▶ Standard bus protocols: UART, CAN(FD), LIN, SPI, I²C
- ▶ Built-in battery, works on the bench or in the field
- ▶ Statistics function and adjustable vertical scale fining
- ▶ Support Wi-Fi, HDMI, USB 3.0/2.0, USB Type-C
- ▶ Segmented Memory support to capture 10000 events

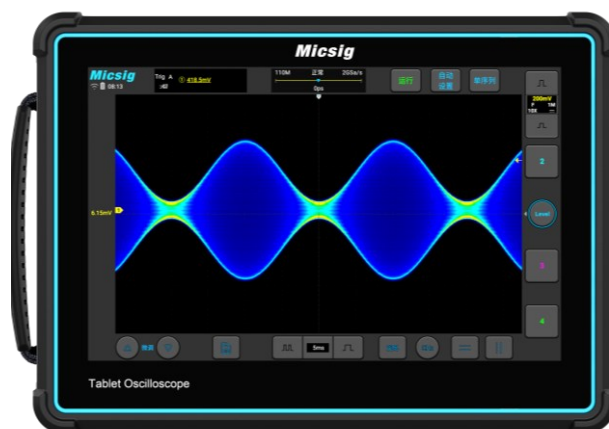

Model	TO3004	TO2004	TO2002	TO1004
Analog Channels	4	4	2	4
Bandwidth	300MHz	200MHz	200MHz	100MHz
Rise Time	≤1.16ns	≤1.75ns	≤1.75ns	≤3.5ns
Sampling Rate (Max.)	2GSa/s	2GSa/s	1GSa/s	1GSa/s
Memory Depth (Max.)	220Mpts		110Mpts	
Waveform Capture Rate	300,000 wfms/s		78,000 wfms/s	
Input Sensitivity Range	1mV/div~10V/div (1MΩ); 1mV/div~1V/div (50Ω)		1mV/div ~ 10V/div (1MΩ)	
Bandwidth limit	20MHz, High pass, Low pass (to 30Hz)		20MHz, High pass, Low pass (to 30KHz)	
Segmented Storage	Support (up to 10,000 Events)		Not support	
Input impedance	1MΩ / 50Ω		1MΩ	
Battery / Duration (typical)	7.4V, 7500mAh / 2H		7.4V, 7500mAh / 5H	
Interfaces	Wi-Fi, USB 3.0/2.0 Host, USB Type-C, Grounding, HDMI, Trigger out			
Vertical Resolution	8-bit			
Display	10.1-Inch TFT-LCD capacitive screen, 1280*800 resolution, 11*10 /divs			
Serial Bus Decoder	RS-232/422/485/UART, CAN, CAN FD, LIN, SPI, I²C			
Trigger Types	Edge, Pulse Width, Logic, Video, Time Out, Slope, Runt, N Edge			
Math	+、-、*、/, FFT, AX+B, Advanced Math			
Remote Control	PC Software, Smartphone App (iOS & Android), SCPI			
Dimension / Weight	265*192*50 mm / 1.9kg (with battery)			

Tablet Oscilloscope

Smart Series



- ▶ Robust hardware, intuitive Android operation system
- ▶ 32GB storage to save large data / videos
- ▶ Support Wi-Fi, HDMI, USB 3.0/2.0 Host/Type-C
- ▶ Bus decode: UART, CAN(FD), LIN, SPI, I²C
- ▶ 8" touchscreen + compact button panel operation
- ▶ Innovative PC & Smartphone App remote control
- ▶ Battery enabled & portable size for easy field work
- ▶ Power-off switch lock, safe to travel and store

Model / Ordering Number	STO1004	STO2002
Analog Channels	4	2
Bandwidth	100MHz	200MHz
Rise Time	≤3.5ns	≤1.75ns
Sampling Rate (Max.)	1GSa/s	
Memory Depth (Max.)	70Mpts	
Waveform Capture Rate (Max.)	130,000 wfms/s	
Input Sensitivity Range	1mV/div~10V/div (1MΩ)	
Internal Storage	32GB	
Vertical Resolution	8-bit	
I/O Ports	Wi-Fi, USB 3.0/2.0 Host, USB type-C, Grounding, HDMI, Trigger out	
Display	8" TFT-LCD capacitive touch screen (800*600), 14 x 10 divisions	
Trigger Types	Edge, Pulse Width, Logic, Video, Time Out, Slope, Runt, N Edge	
Serial Bus Decoding	Std: UART, LIN, CAN, SPI, I ² C, CAN FD; Opt: MIL-STD-1553B, ARINC-429	
Bandwidth Filter	20MHz, High Pass, Low Pass (to 30KHz)	
Auto Measurements	31 types	
Remote Control	PC, Smartphone App (iOS & Android), SCPI	
Dimension / Weight	265*192*50 mm / 1.9kg (with battery)	
Battery (built-in) / Duration	7.4V, 7500 mAh Li-ion battery / 5H	

Virtual Oscilloscope

VTO Series




- ▶ Affordable with professional functions
- ▶ Easy to use on any Android (7.0 above) device
- ▶ Battery powered enables day-long field testing
- ▶ 50Mpts memory depth displays more details
- ▶ Support CAN, LIN bus decode



Model / Ordering Number	VTO2004
Analog Channels	4
Bandwidth	200MHz
Rise time	$\leq 1.8\text{ns}$
Sampling Rate (Max.)	1GSa/s
Memory Depth (Max.)	50Mpts
DC gain accuracy	$\leq 2\%$
Interface	USB Type-C, DC power
Input sensitivity range	5mV/div~10V/div (1M Ω)
Platform	Android 7.0 or above (tablet, smartphone, Android-PC)
Bus decoding	CAN, LIN
Dimension / Battery (optional)	140*215*52mm / 7.4V, 7500mAh

Automotive Oscilloscope


SATO & ATO Series

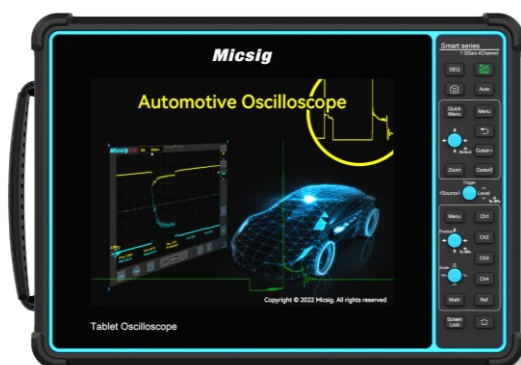

SATO Series



ATO Series

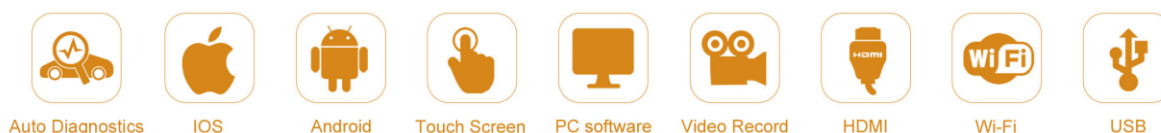


Series	SATO Series		ATO Series			
Model	SATO1004	SATO2002	ATO1004	ATO2002	ATO2004	ATO3004
Analog Channels	4	2	4	2	4	4
Bandwidth	100MHz	200MHz	100MHz	200MHz	200MHz	300MHz
Sampling Rate (Max.)	1GSa/s	1GSa/s	1GSa/s	1GSa/s	2GSa/s	2GSa/s
Memory Depth (Max.)	70Mpts	70Mpts	110Mpts	110Mpts	220Mpts	220Mpts
Waveform Capture Rate (Max.)	130,000 wfms/s		78,000 wfms/s		300,000 wfms/s	
Display	8" TFT-LCD, 800*600 pixel		10.1" TFT-LCD, 1280*800 pixel			
Auto-Diagnostic Tests	Charging Circuits, Starter Circuits, Sensors, Actuators, Ignition, Networks (CAN, CAN FD, LIN, Flexray, K line), Combination Test					
Bandwidth Filter	20MHz, Low Pass (to 30KHz)				20MHz, Low Pass (to 30Hz)	
Bus Decoding	RS-232/422/485/UART, CAN, CAN FD, LIN, SPI, I²C					
I/O Ports	Wi-Fi, USB 3.0/2.0 Host, USB type-C, Grounding, HDMI, Trigger out					
Battery	7.4V, 7500mAh					
Dimension / Weight	265*192*50mm / 1.9kg (with battery)					

Features

- ✧ Comprehensive auto diagnostic presets
- ✧ Powerful signal capture and analysis capability
- ✧ Support PC & Smartphone remote control
- ✧ Portable design with all-in-one functions
- ✧ HDMI function for training & education
- ✧ Life-long free software online update



References

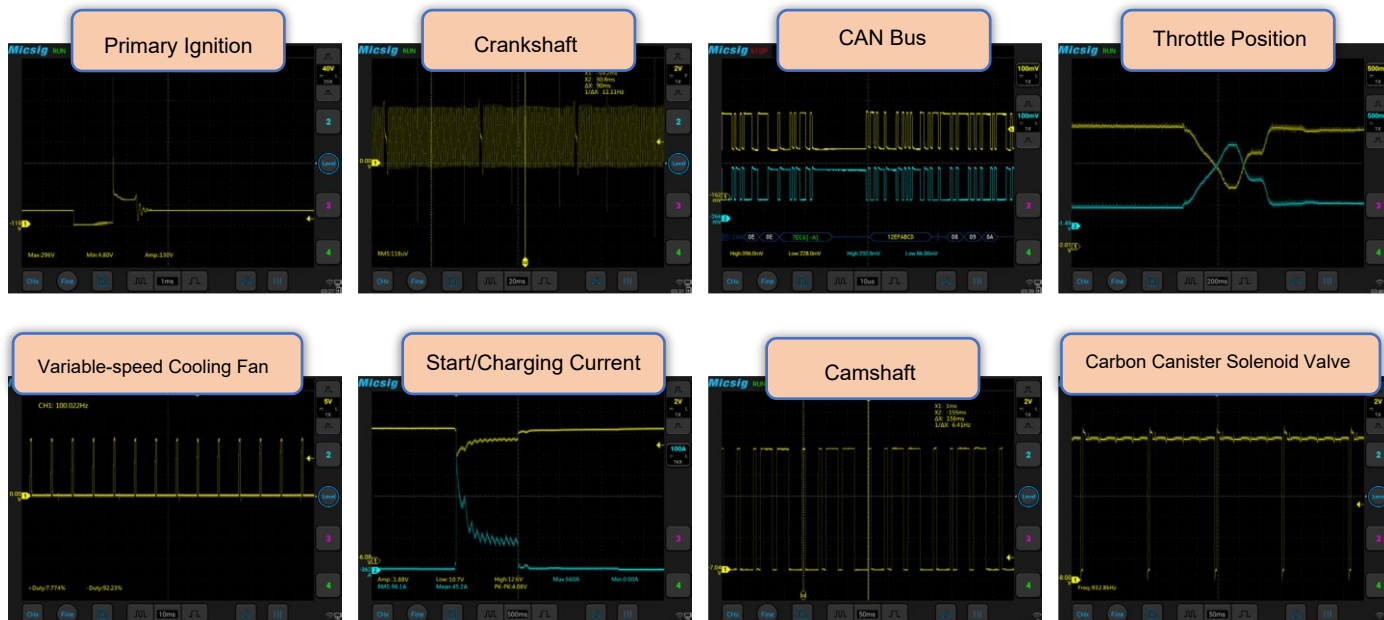

SATO / ATO Standard Kit

	 2 x Passive probe	 2 pair x Test needle	 Power Cable
	 4 x BNC banana lines	 2 pair x Alligator clips	 Adapter


SATO / ATO Master Kit

	 2 x Passive probe	 2 pair x Test needle	 Power Cable
	 4 x BNC banana lines	 2 pair x Alligator clips	 Adapter
	 Secondary Ignition Pickup	 Multimeter Probe	 Hardshell Suitcase

Automotive Oscilloscope

VATO Series

- ▶ 4 channels, 200MHz bandwidth
- ▶ 1GSa/s sampling, 50Mpts memory depth
- ▶ 7500mAh Li-ion battery
- ▶ Display on any Android (7.0 above) devices
- ▶ Comprehensive auto-diagnostic software
- ▶ Test any electronic system on any vehicle

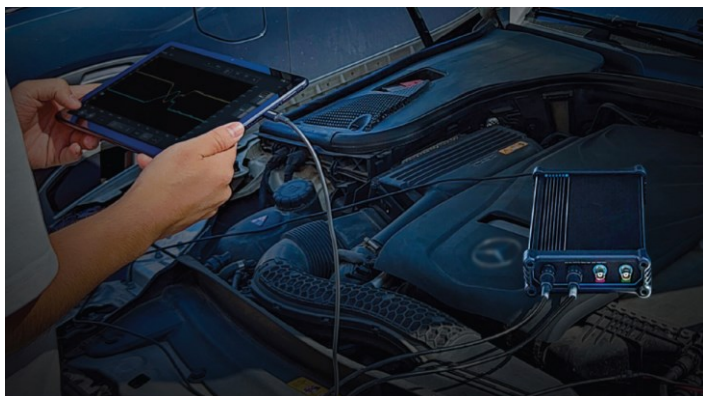

- ♦ **Charging/Start Circuit:** 12V&24V Start, Cranking Current...
- ♦ **Sensor:** ABS, Camshaft, Crankshaft, MAP, Throttle Position...
- ♦ **Actuators:** EGR Solenoid Valve, Injector, cooling fan ...
- ♦ **Ignition:** Primary, Secondary, Primary + Secondary ...
- ♦ **Networks:** CAN High & CAN Low, FlexRay, K line ...
- ♦ **Combination Tests:** Camshaft + Primary Ignition ...

Model / Ordering Number	VATO2004
Analog Channels	4
Bandwidth	200MHz
Rise time	≤ 1.8ns
Sampling Rate (Max.)	1GSa/s
Memory Depth (Max.)	50Mpts
DC gain accuracy	≤ 2%
Interface	USB Type-C, DC power
Input sensitivity range	5mV/div~10V/div (1MΩ)
Platform	Android 7.0 or above (tablet, smartphone, PC)
Bus decoding	CAN, LIN
Dimension / Battery (optional)	140*215*52mm / 7.4V, 7500mAh

Optical-fiber Isolated Probe

SigOFIT

With Micsig's exclusive SigOFIT™ optical isolation technology, the SigOFIT probe has extremely high CMRR and isolation voltage, unveils true signal within its full bandwidth range.

CMRR up to 180dB

**Unveil
Real Signal
You've
Never Seen**



- ▶ Bandwidth: **DC-1GHz**
- ▶ Common Mode Voltage: **85kVpk**
- ▶ DC Accuracy: **1%**
- ▶ Max Differential Voltage: **±6250V**
- ▶ Zero drift: **<0.1%**
- ▶ Noise floor: **<0.45mVrms**

SigOFIT



- CMRR up to 128dB at 100MHz, over 108dB at 1GHz
- DC gain accuracy up to 1%
- Safe to Test Gallium Nitride (GaN)

■ Differential Probe ■ SigOFIT Probe

- Laser-powered, ensures long-time stable test
- Max. differential mode signal up to $\pm 6250V$
- Compact design, simple to use



Specifications

Model*	MOIP100P	MOIP200P	MOIP350P	MOIP500P	MOIP800P	MOIP1000P
Bandwidth	100MHz	200MHz	350MHz	500MHz	800MHz	1GHz
Rise Time	≤3.5ns	≤1.75ns	≤1ns	≤700ps	≤438ps	≤350ps
CMRR	DC: 180dB	DC: 180dB	DC: 180dB	DC: 180dB	DC: 180dB	DC: 180dB
	100MHz: 128dB	200MHz: 122dB	350MHz: 118dB	500MHz: 114dB	800MHz: 110dB	1GHz: 108dB
Output voltage range	±1.25V	±1.25V	±1.25V	±500mV	±500mV	±500mV
Max. differential voltage	±6250V			±5000V		
Noise	<0.45mVrms			<0.45mVrms		
Propagation delay	15.42ns (2m fiber)			16ns (2m fiber)		
Power Supply	12V/3A					
DC Gain Accuracy	1%					
Common Mode Voltage Range	85kVpk					
Cable Length	2m (customizable)					

* Note: Model names updated on March 20, 2024, previous model names referred as MOIP01P, OIP100 (e.g. 100MHz bandwidth)..

High Voltage Differential Probe

MDP Series




Originated from Micsig's cutting-edge SigOFIT™ technology, the MDP series probe has excellent amplitude-frequency characteristics and common mode rejection capability, allow users to test high-frequency, high-voltage signal with ease.

- High accuracy, high CMRR
- Max. differential voltage: 3000Vpk
- Up to 500MHz bandwidth
- 5MHz bandwidth limit (available on 100MHz~200MHz only)
- Standard BNC interface
- Compact & Exquisite design

Specifications (100MHz ~ 200MHz)

Model	MDP700	MDP701	MDP702	MDP1500	MDP1501	MDP1502	MDP3000	MDP3001	MDP3002
Bandwidth	100MHz	150MHz	200MHz	100MHz	150MHz	200MHz	100MHz	150MHz	200MHz
Rise time	≤3.5ns	≤2.33ns	≤1.75ns	≤3.5ns	≤2.33ns	≤1.75ns	≤3.5ns	≤2.33ns	≤1.75ns
Attenuation	20X / 200X			50X / 500X			100X / 1000X		
Accuracy	±2%			±2%			±2%		
Max. Differential Voltage (DC+AC PK)	70V (20X)			150V (50X)			300V (100X)		
	700V (200X)			1500V (500X)			3000V (1000X)		
Max. Common Mode Input Voltage	CAT I 600V CAT II 450V			CAT II 1000V CAT III 600V			CAT III 1000V		
Noise	Full Bandwidth: 20X: ≤ 22mVrms 200X: ≤ 80mVrms 5MHz bandwidth limit: 20X: ≤ 8mVrms 200X: ≤ 70mVrms			Full Bandwidth: 50X: ≤ 45mVrms 500X: ≤ 200mVrms 5MHz bandwidth limit: 50X: ≤ 20mVrms 500X: ≤ 175mVrms			Full Bandwidth: 100X: ≤ 90mVrms 1000X: ≤ 400mVrms 5MHz bandwidth limit: 100X: ≤ 40mVrms 1000X: ≤ 350mVrms		
CMRR	DC: >-80dB 100kHz: >-60dB 10MHz: >-30dB 100MHz: >-26dB								
Delay	11.99ns at 20X 12.27ns at 200X			11.99ns at 50X 12.27ns at 500X			11.99ns at 100X 12.27ns at 1000X		
Input impedance	16MΩ / 1.5pF(differential) 8MΩ / 3pF(each input to ground)			16MΩ / 1.5pF(differential) 8MΩ / 3pF(each input to ground)			20MΩ / 1.5pF(differential) 10MΩ / 3pF(each input to ground)		
Output voltage	≤3V								
Power supply	2W								
Overrange	LED flashes, Buzzer beeps								

MDP Series

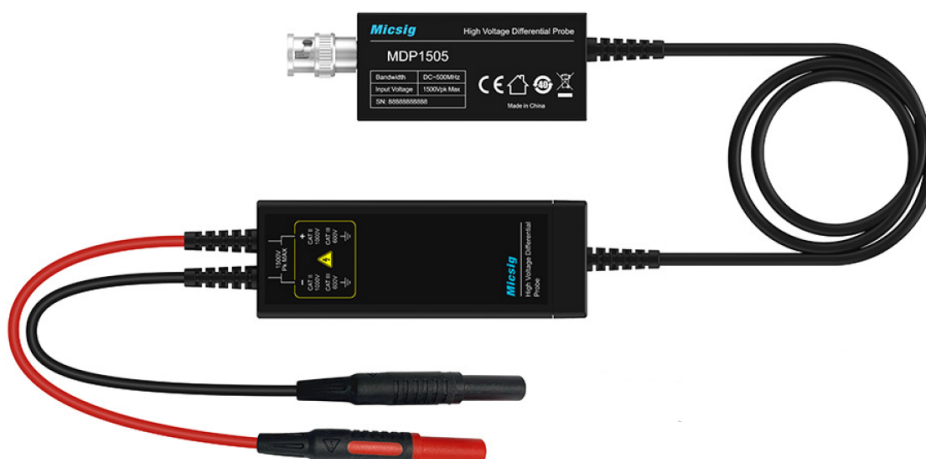

Specifications (300MHz ~ 500MHz)

Model	MDP703	MDP704	MDP705	MDP1503	MDP1504	MDP1505	MDP3003	MDP3004	MDP3005
Bandwidth	300MHz	400MHz	500MHz	300MHz	40MHz	500MHz	300MHz	40MHz	500MHz
Rise time	≤1.2ns	≤0.87ns	≤0.7ns	≤1.2ns	≤0.87ns	≤0.7ns	≤1.2ns	≤0.87ns	≤0.7ns
Attenuation	20X / 200X			50X / 500X			100X / 1000X		
Accuracy	±2%			±2%			±2%		
Max. Differential Voltage (DC+AC PK)	70V (20X) 700V (200X)			150V (50X) 1500V (500X)			300V (100X) 3000V (1000X)		
Max. Common Mode Input Voltage	CAT I 600V CAT II 450V			CAT II 1000V CAT III 600V			CAT III 1000V		
Noise	Full Bandwidth: 20X: ≤ 80mVrms 200X: ≤ 100mVrms			Full Bandwidth: 50X: ≤ 200mVrms 500X: ≤ 250mVrms			Full Bandwidth: 100X: ≤ 400mVrms 1000X: ≤ 500mVrms		
CMRR	DC: >-80dB 100kHz: >-70dB 20MHz: >-40dB 120MHz: >-26dB								
Delay	8.44ns at 20X 7.9ns at 200X			8.44ns at 50X 7.9ns at 500X			8.44ns at 100X 7.9ns at 1000X		
Input impedance	16MΩ / 1.5pF(differential) 8MΩ / 3pF(each input to ground)			16MΩ / 1.5pF(differential) 8MΩ / 3pF(each input to ground)			20MΩ / 1.5pF(differential) 10MΩ / 3pF(each input to ground)		
Output voltage	≤3V								
Output impedance	50Ω								
Cable length	Approx. 8 cm (Input); Approx. 120cm (Output)								

High Frequency AC/DC Current Probe

CP Series



- ▶ AC/DC measuring capabilities
- ▶ Superior 1% DC accuracy (typical)
- ▶ Degaussing / Auto Zero setting
- ▶ Overload flashing light indicator

Model / Ordering Number	CP503B	CP1003B
Bandwidth	50MHz	100MHz
Rise Time	$\leq 7\text{ns}$	$\leq 3.5\text{ns}$
Interface	Standard BNC	
Range	6A (2X) / 30A (10X)	
Output Sensitivity	1V/2A (6A) 1V/10A (30A)	
DC Accuracy (typical)	$\pm 1\% \pm 10\text{mA}$ (6A) $\pm 1\% \pm 50\text{mA}$ (30A)	
Delay	< 30ns (6A) < 30ns (30A)	
Input Current Range	20mA~6Apk (6A) 50mA~30Apk (30A)	
Max. Current Input	30Apk, 60Apk-pk, 21.21Arms	
Noise	$\leq 1.4\text{ mA RMS}$ (@ 20 MHz; Range 30A, 10X)	
Max. Working Voltage	CAT I 300V	
Max. Conductor Diameter	5mm	
Overload Indicator	Flashing light	
Power Supply	DC 5V 3A	

Low Frequency AC/DC Current Probe

CP2100 Series

- Bandwidth up to 2.5MHz
- Switchable Current Range: 10A / 100A
- Compact design with reliable performance
- USB power supply, no need extra adapter
- Compatible with any BNC-type oscilloscope



Model / Ordering Number	CP2100A	CP2100B
Bandwidth	DC~800KHz	DC~2.5MHz
Rise Time	≤437.5ns	≤140ns
Range	10A/100A	
Output Sensitivity	0.1V/A (10A) ; 0.01V/A (100A)	
DC Accuracy (typical)	3%±50mA (10A) 4%±50mA (100A, 500mA~40Apk) 15% (100A, 40Apk~100Apk)	
Signal Delay	< 150ns (10A) < 200ns (100A)	
Current Range	50mA~10Apk (10A) 1A~100Apk (100A)	
Max. Measuring Range	100Apk, 70.7Arms (DC+AC, pk) 200Apk-pk, 70.7Arms (AC)	
Max. Working Voltage	CATIII 300V ; CAT II 600V	
Max. Conductor Diameter	13mm	
Overrange Alarm	Buzzer beeps, flashing light	
Power Supply	DC 5V	
Input Cable Length	45cm	
Output Cable Length	90cm	
Operating Temperature	0℃-50℃	
Operating Humidity	10%-85%	

Rogowski AC Current Probe

RCP Series




- Up to 30MHz bandwidth
- Max. 3000A AC current measurement capability
- 1% typical accuracy
- 1.6mm coil cross-section diameter
- Standard BNC interface

Model	RCP60XS	RCP300XS	RCP600XS	RCP1200XS	RCP3000XS
Bandwidth	85Hz-30MHz	10Hz-30MHz	10Hz-30MHz	12Hz-30MHz	3Hz-30MHz
Measurement Range	20mA _{pk} -60A _{pk}	200mA _{pk} -300A _{pk}	200mA _{pk} -600A _{pk}	600mA _{pk} -1200A _{pk}	600mA _{pk} -3000A _{pk}
Output Sensitivity	100mV/A (10X)	20mV/A (50X)	10mV/A (100X)	5mV/A (200X)	2mV/A (500X)
Output noise	< 20mV _{pp}	< 18mV _{pp}	< 12mV _{pp}	< 5mV _{pp}	< 5mV _{pp}
Peak di/dt	4kA/μs	20kA/μs	40kA/μs	70kA/μs	70kA/μs
Droop	65%/ms	9%/ms	6%/ms	3%/ms	2%/ms
Accuracy (typical)	1%				
Offset voltage	<±1mV				
Effect of conductor position	Within ±1% (deviation from center)				
Peak coil isolation voltage	AC 1kV _{rms} (1 min) (50Hz/60Hz) (Rogowski coil part only)				
Power supply	DC 12V				
Coil cross-section diameter	1.6mm				
Interface	1MΩ BNC				
Coil inner diameter	25mm (customizable)				
Coil circumference	80mm (customizable)				
Wire length (integrator to coil)	1.5m (customizable)				
Working temperature	Base unit : 0℃ - 55℃ Coil : -20℃ - 125℃				

RCP500

- Compactly designed, exquisite appearance
- 1% high accuracy with less than 2mV noise
- Rogowski coil measurement system
- Standard adapter for all BNC interface

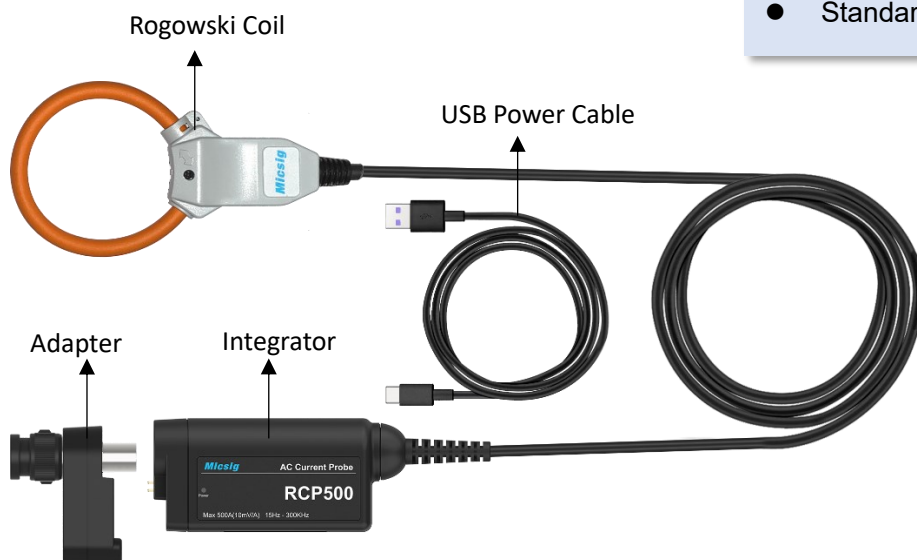

Model / Ordering Number	RCP500
Bandwidth	15Hz - 300KHz (-3dB)
Current Range	200mA (pk) - 500A (pk)
Output Sensitivity	10mV/A
Output Noise	< 2mV rms
Typical Accuracy	1%
Phase Accuracy	$\leq 0.8^\circ$ (45Hz-66Hz)
Offset Voltage	$\pm 1\text{mV}$ or below
Max. Voltage	AC 10kV RMS (1 minute), (50Hz/60Hz) (Rogowski coil part only)
Conductor Under Test Diameter	$\leq \phi 50\text{mm}$
Power Supply	Micsig UPI probe interface (EOL); PA05 Adapter (USB cable)
Conductor Positional Accuracy	Within $\pm 1\%$ (Deviation from the Center)
Influence of External Magnetic Fields	1.5% f.s. or below (400A/m, 50Hz/60Hz)
Coil to Integrator Cable Length	2m (customizable)
Operating Temperature	-20-70°C
Operating Altitude	$\leq 2000\text{m}$

AC Current Probe

ACP1000

- Open clamp design
- BNC connection to all oscilloscope
- Operating frequency: 10Hz–100kHz
- Max. peak current: 2000A (2s)
- Output signal: mV/A
- Maximum accuracy: 1%
- Safety category: CAT III 600V



Model / Ordering Number	ACP1000
Input Current	0.1-10A 0.1-100A 1-1000A
Rated Output	100mV/A 10mV/A 1mV/A
Frequency	10Hz-100KHz
Rated Load	≥ 100KOhms
Accuracy	3%±10mV 2%±5mV 1%±1mV
Current range	0.1A-1000A
Maximum accuracy	1%
Safety category	CAT III 600V
Max. conductor diameter	52mm
Size	111mm x 216mm x 45mm

Accessories

MS-A-001

BNC to banana lead


MS-A-004

IC pincer clips / pair


MS-A-005

multimeter probe / pair


MS-A-006

alligator clips B / pair


MS-A-007

piercing needle / 5pcs


MS-A-008

automotive pickup


MS-A-009

flexible needle / pair


MS-A-010

multimeter pen


MS-A-011

alligator clips S / pair


MS-A-012


piercing test hook


T3100

HV probe 2000V/100X


P130A

BNC probe 600v/200MHz


P300

BNC probe 600v/300MHz


MS-Adapter

power adapter 12V 4A


MS-Mask

Screen protector


MS-HB

oscilloscope handbag


MS-SC-1

Suitcase for Smart/TO series


MS-SC-2

Suitcase for SATO/ATO series


MS-BA-7213400

Battery for ETO series


MS-BA-747500

Battery for TO/ATO/
STO/SATO/VTO/VATO
series




Follow Us:



@Shenzhen Micsig Technology Ltd



@Micsig Technology



@MicsigOscilloscope

- * Micsig reserves the right of final interpretation for the content hereinabove;
- * It is subject to update without prior notice;
- * Please contact local distributor for any inquiry or send us email directly.

Shenzhen Micsig Technology Co., Ltd.

Add: 1F, Bldg A, Huafeng International Robot Industrial Park,
Hangcheng Rd, Bao'an, Shenzhen, Guangdong, China, 518126

Tel: +86-755-88600880

E-mail: sales@micsig.com

Website: www.micsig.com

Micsig[®]